


Mission Dart Cabinet Mounting Instructions:

Step 1:

Locate 2 studs in wall for attachment of supplied "Wall Cleat".

Attach the cleat with the bottom edge located at 79.75".
(Screws are NOT provided)


Note: Top of the cleat should angle up and away from the wall.



Step 2:

Hang cabinet on wall cleat.

Bottom of cabinet should be 46" + or - from floor once in position.

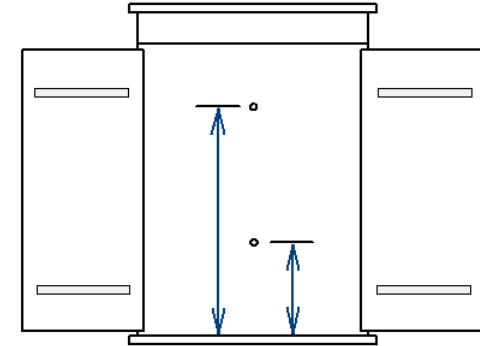

Step 3:

If mounting the Arachnid Cricket Pro 650 or Pro 900:
Measure up from the floor of the cabinet and install 2 mounting screws, centered left to right, one at 13.5" & one at 29.5".

If mounting a steel tip bristle board:
Measure up from the floor of the cabinet and install the hanging bracket, centered left to right, at 21".

Note: There is a hole in the back of the cabinet for your power cord to run through. You can also drill a 3/8" hole for the power cord in either the lower left or lower right corner of the floor of the cabinet...depending on where your electrical outlet is located.

Tools needed: Level, cordless drill, 3/16" & 3/8" drill bits, screw tip.

Supplies needed: Screws to mount wall cleat to wall surface.